

## **SILVER BRUSH**


### **heelproof entrance mat with brush profile**

**Silver Brush heel proof entrance mat** is a heavy duty primary entrance mat consisting of interlocking tiles with hard wearing nylon brushes providing excellent scraping properties. Silver Brush mat is ideal for applications where performance under the severest of traffic conditions is required.

Specifically engineered to withstand extra heavy footfall, Silver Brush mat can be used in airports, shopping centres, supermarkets, department stores, subway stations and hotels.

Silver mat is ideally suited to internal and external areas where mud or heavy soiling is a problem. Parallel lines of aggressive polyamide nylon 6.6 brush bundles remove the heaviest of soiling.

High grade special vinyl/NBR tiles provide impact sound insulation and slip resistance.

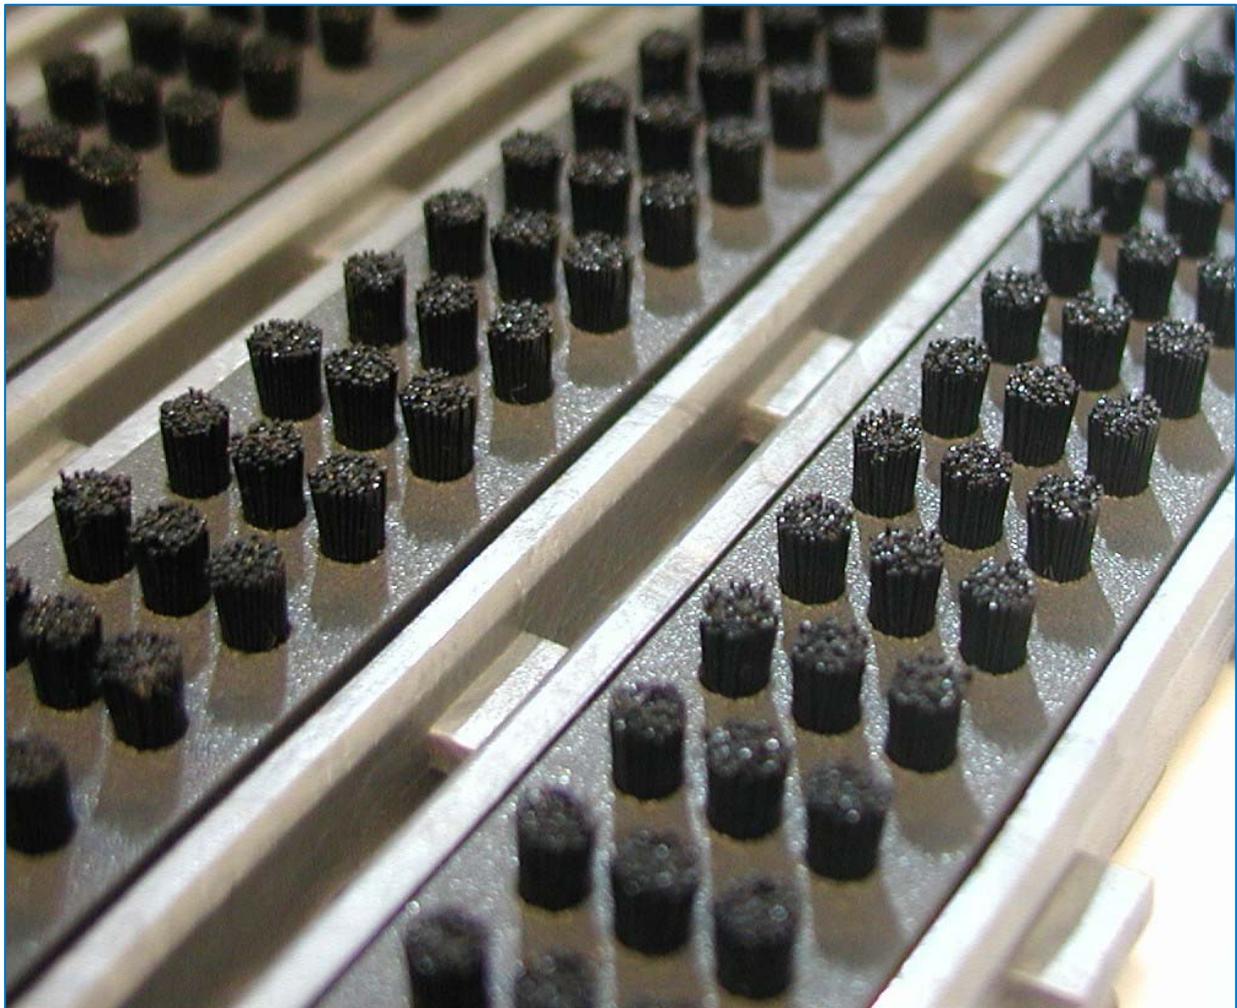

*Silver Brush is an aggressive scraper matting system available in interlocking tiles.*

## SILVER BRUSH

### Interlocking modular tiles


Silver Brush tiles are easy to cut to size and shape. Interlocking modular tiles allow you to create an entrance mat of any length and width.

### Easy maintenance

Simply vacuum surface and floor below. Silver is easy to roll up for maintenance. Dirt that falls through the mat can be simply vacuum cleaned from the floor underneath. For extreme soiling hose down with a high pressure washer.

### Good drainage and non-slip surface

Silver has slip resistant surface and it offers maximum drainage. Open construction allows water to pass through the mat, providing safe and dry surface.

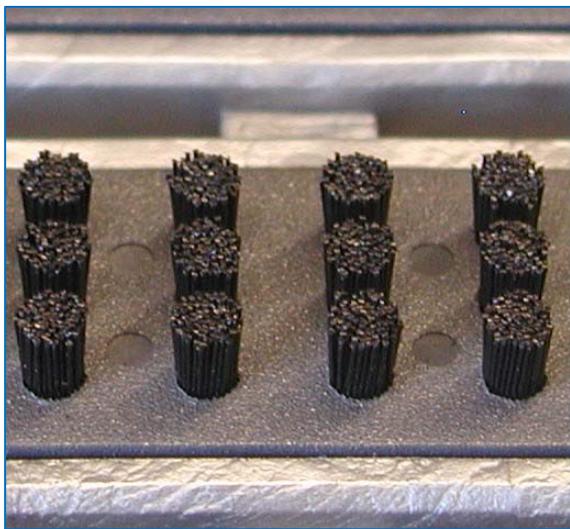


**Parallel arranged bristle bundles scour snow, mud and other heavy contaminants from the shoe, boot or wheel.**



**Round, high density polyamide nylon 6.6 brush bundles guarantee optimal functioning for many years.**

SPECIFICATIONS:	
Tile material:	UV-resistant vinyl/NBR. Resists most chemicals and oils. 100 % recyclable.
Brush material:	Polyamide Nylon 6.6
Tile size:	38,5 x 12,4 cm
Packaging:	20 tiles / pkg (= 0,95 m <sup>2</sup> )
Height:	17 mm
Weight:	10 kg / m <sup>2</sup>
Brush colour:	Black
Tile colour:	Aluminium
Temperature resistance:	-35°C - +70°C
Rolling load:	KfB dynamic test: 500 kg per wheel
Slip resistance:	DIN 51130: R12
Fire classification:	EN 13501: Cfl - s2
Emissions:	ISO 16000-9: TVOC class A+

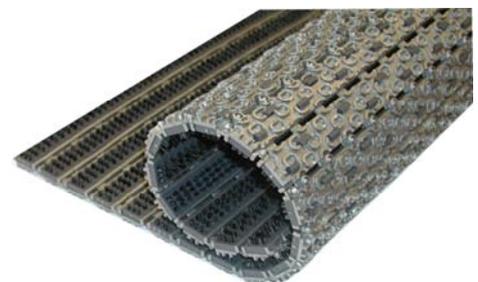

### Muovihaka

Kuusimäentie 12, 01900 Nurmijärvi, FINLAND

Tel: +358 9 290 22 20

info@muovihaka.com

Fax: +358 9 250 48 07

www.muovihaka.com